



INSTALLATION INSTRUCTIONS

Accessory

WHEEL STRIPE
P/N 08F70-MKS-E20ZD

Application

CRF1100A4/D4

Publication No.


MII 17351

Issue Date

February 2020

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

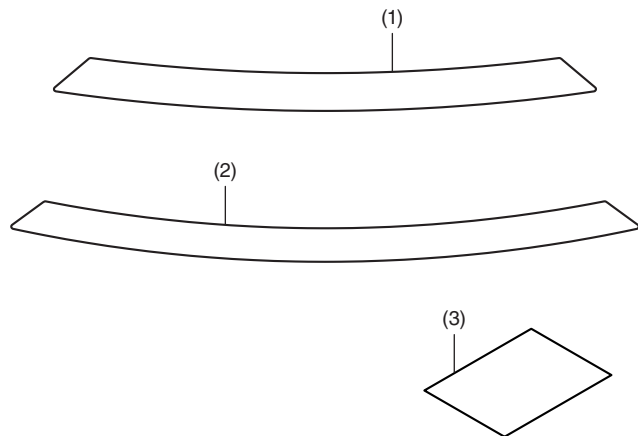

No.	Description	Qty
(1)	Rear wheel stripe	4
(2)	Front wheel stripe	4
(3)	Installation Instruction URL	1

SUPPLIES REQUIRED

Isopropyl alcohol

Shop towel


INSTALLATION

▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTE:

- Heat the bonding surfaces with a hair dryer if the ambient air temperature is below 70°F (21°C).
- The adhesive reaches full strength in 72 hours. Wait at least 24 hours before riding your motorcycle.
- To neatly attach this accessory, attach it while safely lifting the tire with the maintenance stand or similar and adjusting the space between the wheel stripe and rim.
- Attach the two wheel stripes to one side of the wheel in a diagonal line while avoiding the valve as shown.

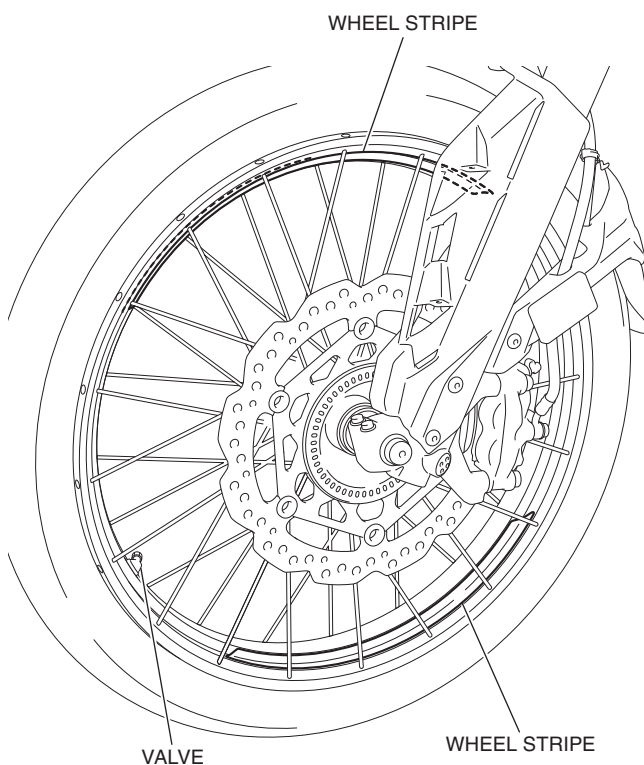


1. Clean the surface of the area shown using isopropyl alcohol.

<Left side>

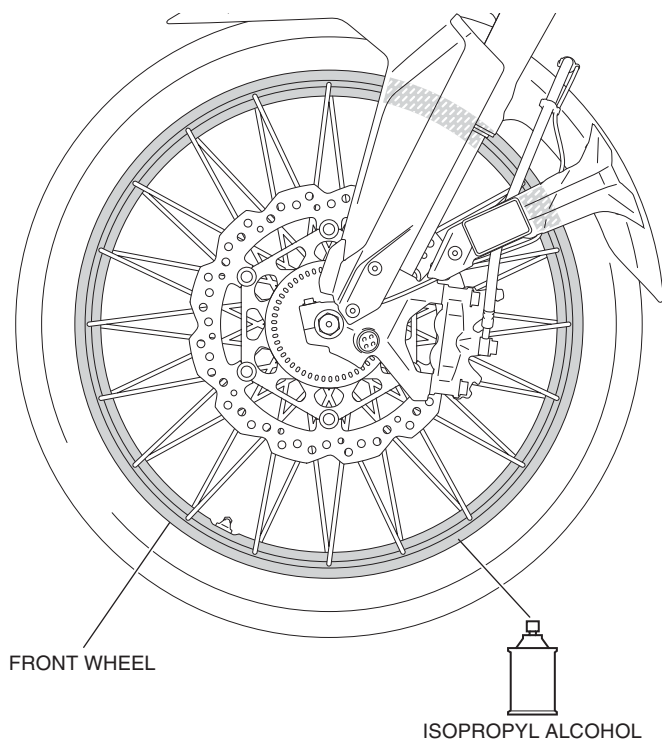


2. Remove the adhesive backing on the front wheel stripe as shown.

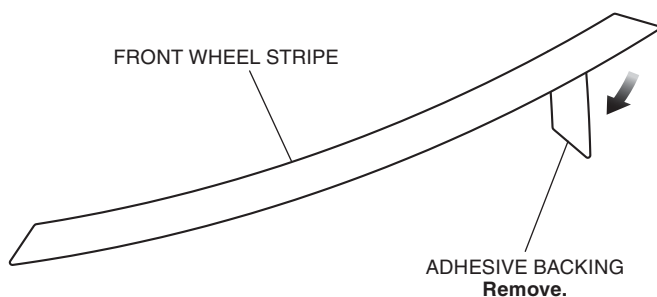


3. Attach the front wheel stripe as shown.


- Attach the front wheel stripe aligning the edge with the spoke and avoiding the valve.
- Being careful not to allow air bubbles, apply the front wheel stripe while adjusting the space between the front wheel stripe and the rim.
- Do not pull or stretch the front wheel stripe while applying it.

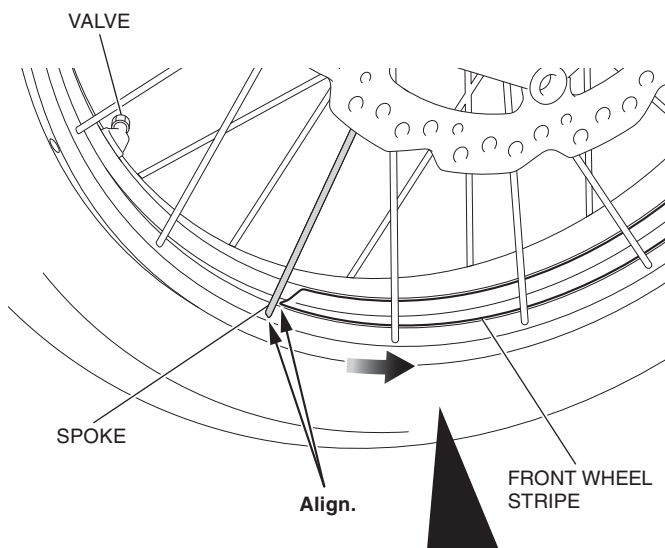


Attach the front wheel stripe avoiding R part of the rim as shown.

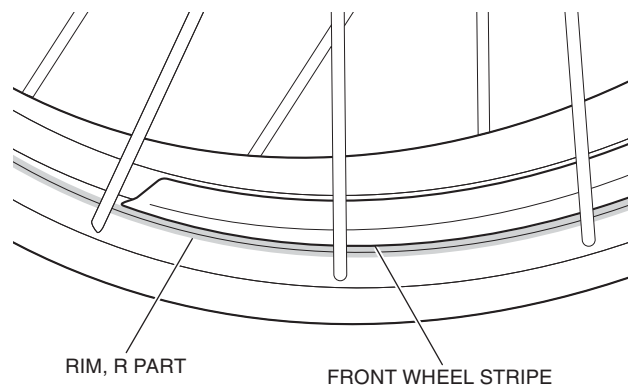

4. Using a shop towel, force out excessive air.

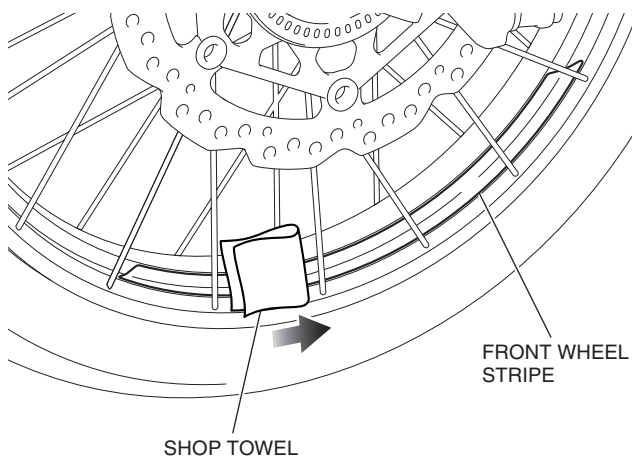

5. Install the front wheel stripe in the same way as the diagonal side.
 - **Attach the second front wheel stripe aligning its edge with the diagonal spoke at the beginning of attaching the first front wheel stripe.**

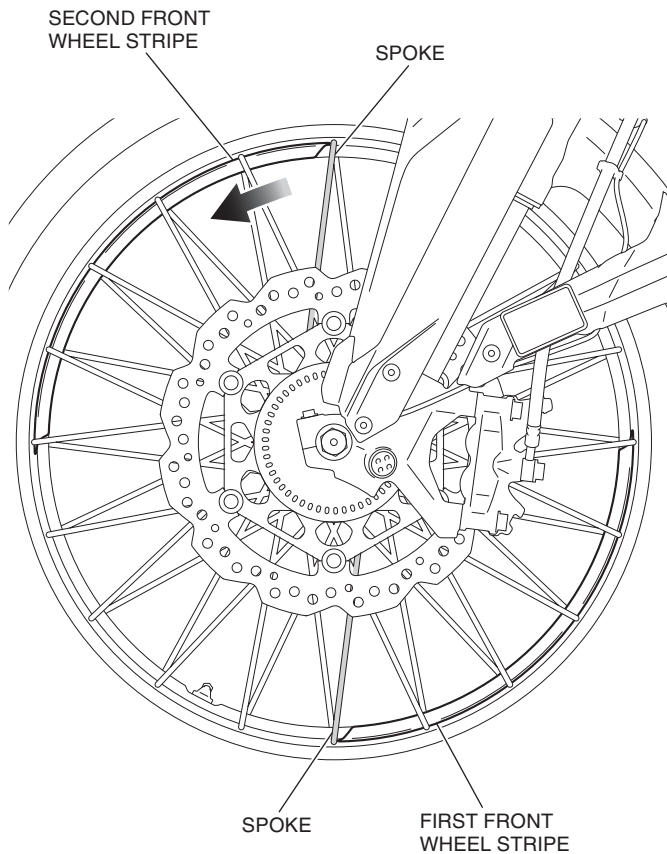

6. Install the right side of the front wheel stripe in the same manner as the left side.
 - **Install the right side of the front wheel stripe in the same position as the left side.**
7. Install the rear wheel stripe in the same way as the front.