


## PARTS LIST

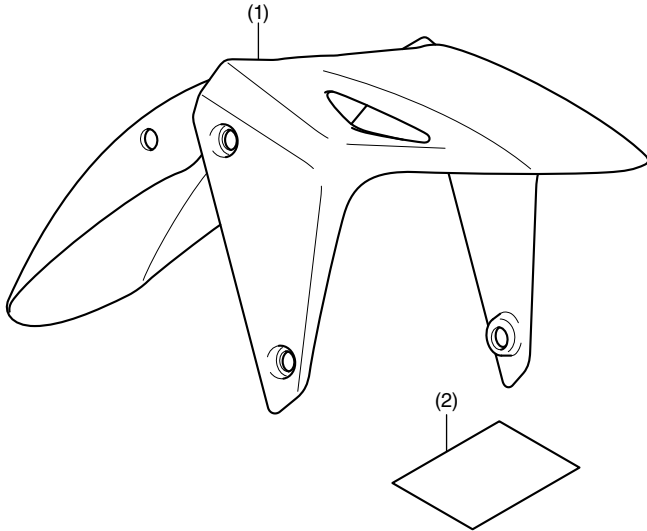

No.	Description	Qty
(1)	Front fender	1
(2)	Installation Instruction URL	1

## TORQUE INFORMATION

Refer to the Service Manual for the torque values of the removed parts.

## INSTALLATION




### ▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

### NOTE:


- Take care not to damage the painted surfaces of the motorcycle.
- Reinstall the removed parts on the motorcycle and make sure that wires and harnesses are not pinched.
- Illustrations show CBR500RA type, other types are similar.**

1. Remove the existing front fender as shown.

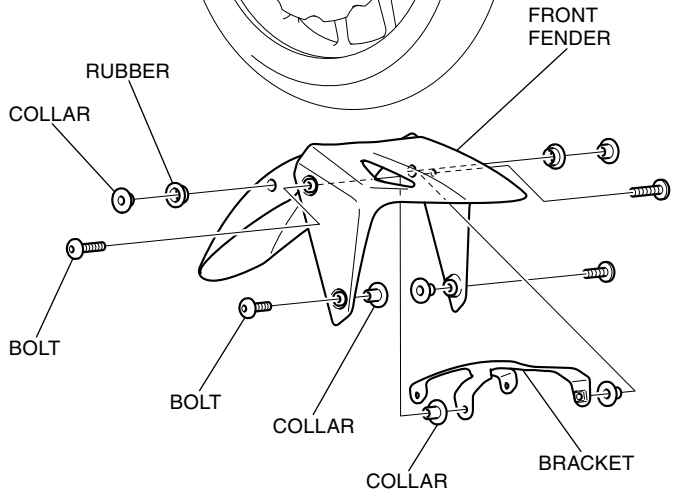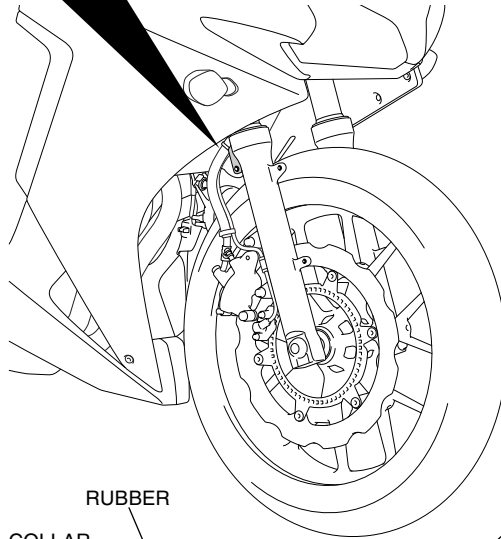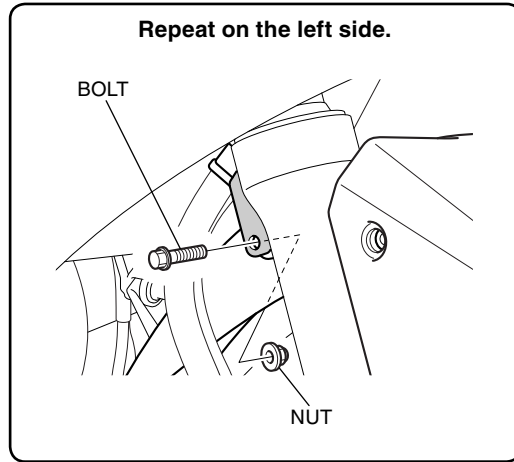

2. Remove the grommets as shown.

- Repeat on the left side.

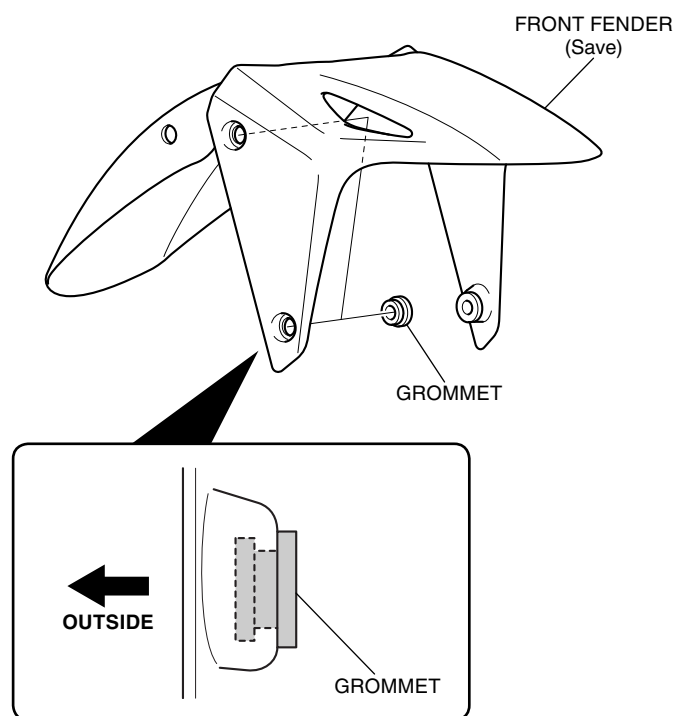

3. Install the accessory front fender in the reverse order of removal.