



# INSTALLATION INSTRUCTIONS


Accessory  
14-inch ALUMINUM REAR WHEEL  
P/N 08W71-HL4-A01

Application  
SXS1000M3/M3P/M5P

Publication No.  
**MII 15262**  
Issue Date  
**September 2015**

**Honda Dealer: Please give a copy of these instructions to your customer.**

## PARTS LIST

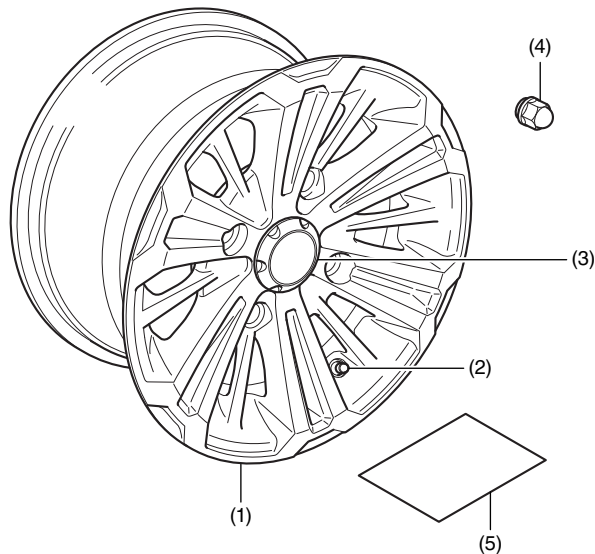

No.	Description	Qty
(1)	Rear wheel	1
(2)	Valve	1
(3)	Center cap	1
(4)	Wheel nut	4
(5)	Installation Instructions URL	1

## TOOLS REQUIRED

Socket (19 mm)

Ratchet

Extension

Torque wrench

## TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N·m	kgf·m	lbf·ft
Wheel nut	108	11	80

## SPECIFICATIONS

Size	14 x 6.5 in
PCD	4 on 136 mm
Cold tire pressure	100 kPa (1.0 kgf/cm <sup>2</sup> , 14 psi)

## INSTALLATION

### NOTE:

- Have your authorized Honda dealer install the tires on your rear wheel.
- Use only the wheel nuts that are included in this accessory kit.
- Refer to the Owner's Manual or page 1-33 of the Service Manual for lift and support points.

1. Install the tires onto the wheels.
  - **Inflate the tires to the specified air pressure.**
2. Install the wheels on the vehicle as shown.
3. Tighten the wheel nuts to the value specified in the Torque Chart.

