

# HONDA

## INSTALLATION INSTRUCTIONS

Accessory

BACK UP ALARM MOUNT  
P/N: 08Z73-HL3-600

Application

After '16 SXS700M2/M2D/  
M4/M4D

Publication No.

MII 15753

Issue Date

August 2016

**Honda Dealer: Please give a copy of these instructions to your customer.**


### PARTS LIST



No.	Description	Qty
(1)	6 x 12 mm flange bolt	1
(2)	6 mm flange nut	1
(3)	Installation Instruction URL (not shown)	1

#### BACK UP BUZZER

Sold separately P/N 08V70-HL5-A00

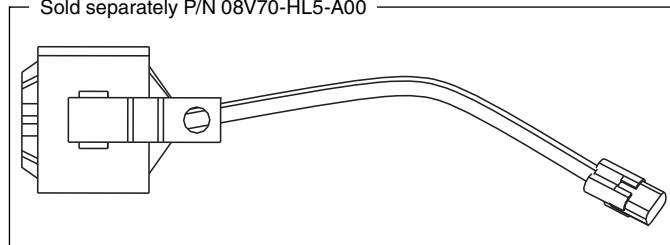

### TOOLS AND SUPPLIES REQUIRED

10 mm socket

10 mm box wrench

#3 Phillips screwdriver

Ratchet

Torque wrench

Trim clip puller Honda No. (07AAC-SJAA-100)

### TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.


Item	N·m	kgf·m	lbf·ft
6 mm flange bolt and nut	12.0	1.2	8.9

### USE AND CARE INFORMATION


Check the accessory mounts frequently and retighten if necessary.

### INSTALLATION


1. Lift the cargo bed.

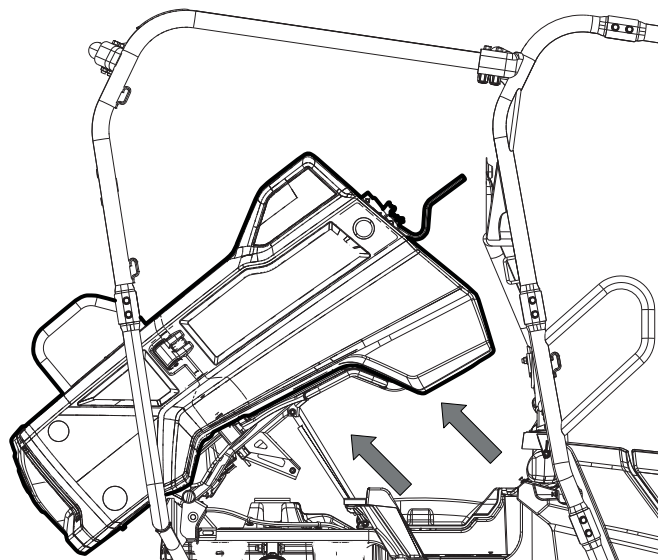


2. Refer to Service Manual to remove the center rear foot well (M4/M4D types only).

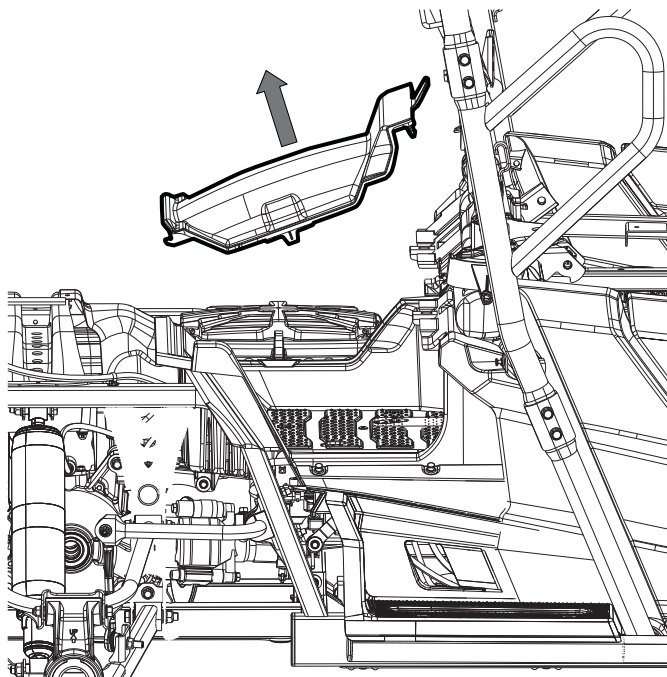


3. Refer to Service Manual to remove the right rear foot well (M4/M4D types only).

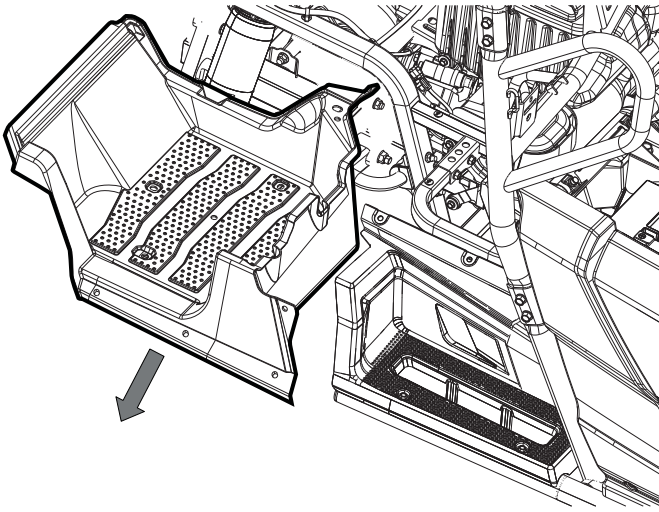


4. Refer to Service Manual to remove the right rear step (M4/M4D types only).

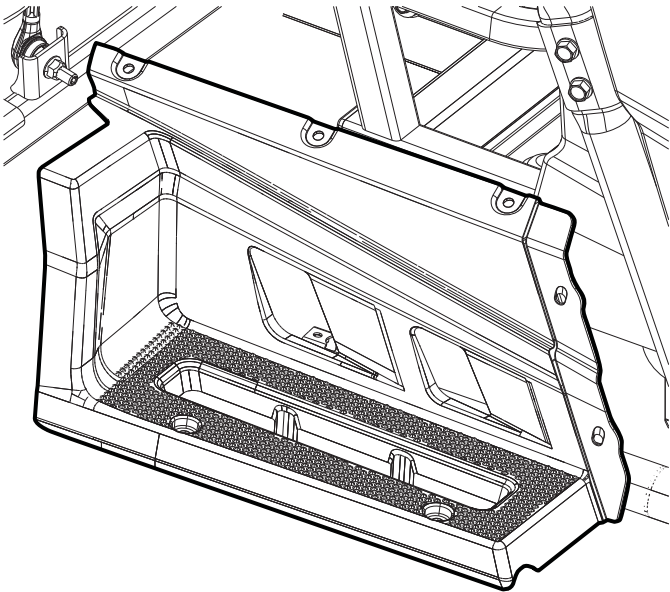

5. Remove the dummy plug.

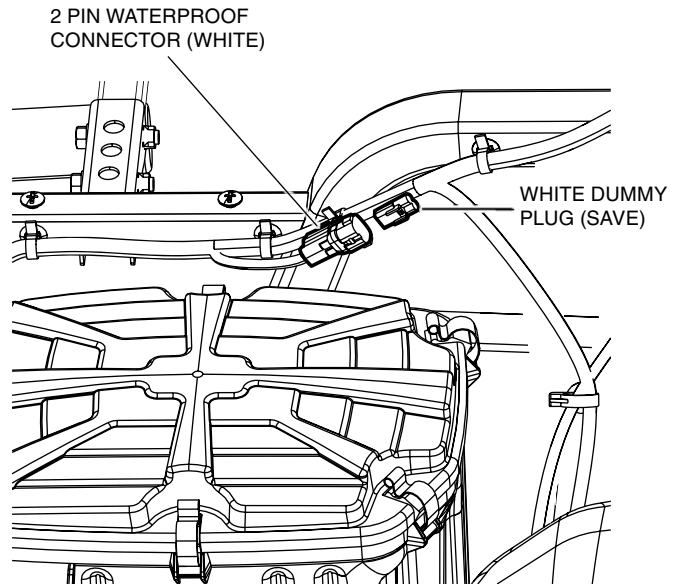

6. Install the back up buzzer using the 6 x 12 mm flange bolt and 6 mm flange nut.  
**Note:** Angle the back up buzzer to avoid contact with the breather hose.

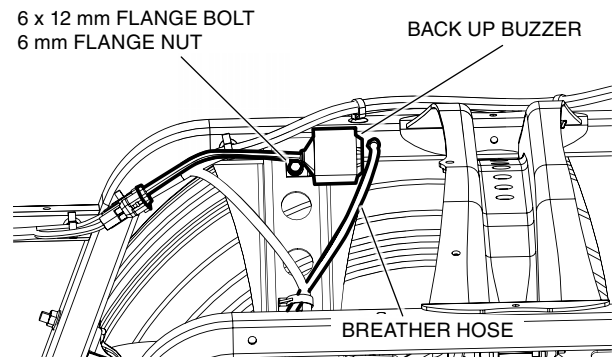

7. Shift the vehicle into reverse and confirm that the back up buzzer is working correctly.
8. Refer to the Service Manual to reinstall the removed parts in the reverse order of removal.