



INSTALLATION INSTRUCTIONS

Accessory

SKID PLATE, HMW
P/N 0SK30-HL4-A00

Application

SXS1000M3/M5/M6

Publication No.


MII 17762

Issue Date

August 2022

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

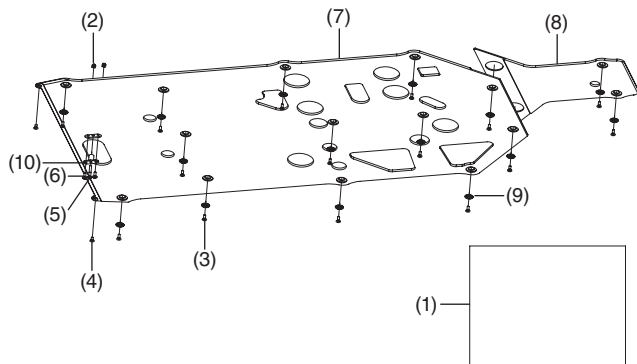

No.	Description	Qty
(1)	Installation Instructions URL	1
(2)	6 mm nut	2
(3)	6 x 16 mm flat head socket bolt	15
(4)	6 x 12 mm socket bolt	2
(5)	6 x 40 mm socket bolt	1
(6)	6 x 16 mm button head socket bolt	2
(7)	Main skid plate	1
(8)	Rear skid plate	1
(9)	Washer	15
(10)	Aluminum spacer	1

TOOLS AND SUPPLIES REQUIRED

4 mm hex wrench or key

10 mm socket or wrench

Ratchet

Torque wrench

TORQUE CHARTS

Tighten all screws, bolts, and nuts to their specified torque values.

Item	N·m	kgf·m	lbf·ft
6 mm bolt	10.0 ± 2.0	1 ± 0.20	7.5 ± 1.5


INSTALLATION ON PIONEER 1000 6P

When installing the 0SK30-HL4-A00 Skid Plate, HMW 4P on a pioneer 1000 6-crew vehicle, refer to the installation instruction provided with the 0SK30-HL8-A00 Skid Plate, HMW 6P.


INSTALLATION

⚠ CAUTION: To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


1. Remove the 2 original skid plates and fasteners from the vehicle. **The OEM fasteners will not be reused.**

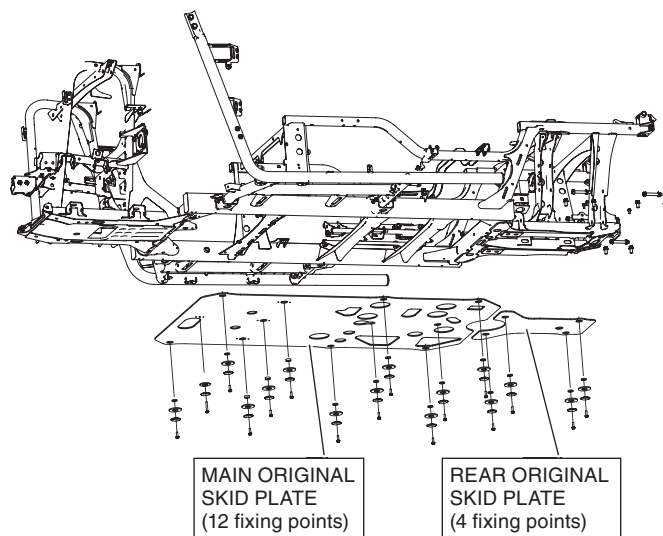


2. Install the new rear skid plate. Loosely tightened the two 6 x 16 mm flat head socket bolt and washers.

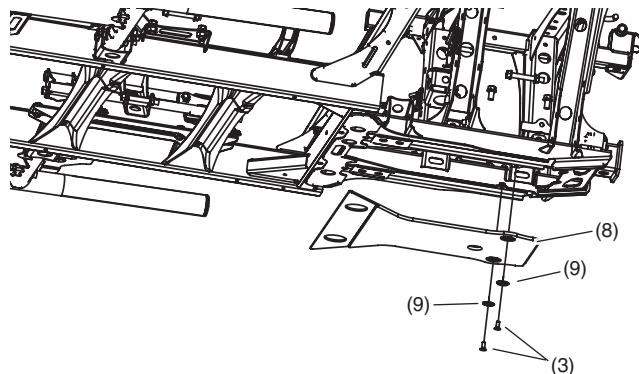



3. Install the aluminum spacer with two 6 x 16 mm button head socket bolts and nuts at the front section of the main skid plate. Secure to required torque from chart on first page.

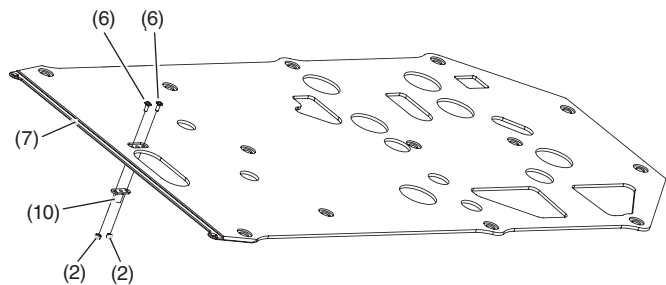

4. Install the new main skid plate. Align new main skid plate to the holes in the rear skid plate. Loosely tighten all fasteners (flat head socket bolt 6 x 16 mm and washer).

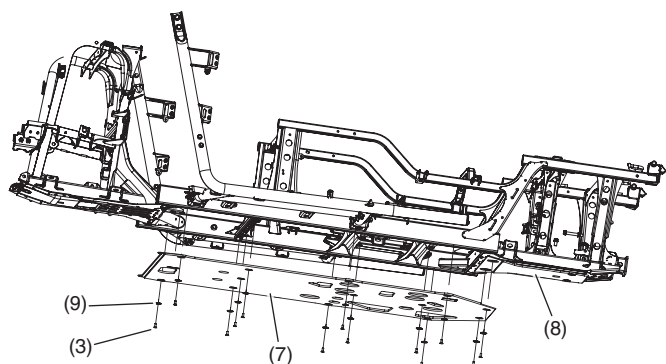

5. Install the 6 x 40 mm socket bolts in the remaining hole of the aluminum spacer. Install the 6 x 12 mm socket bolts at the front area of the main skid plate.

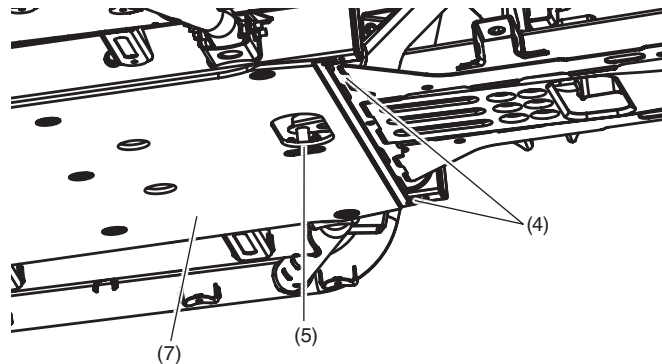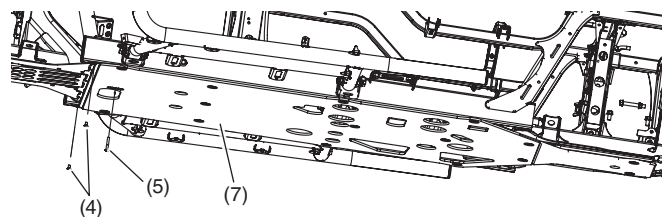

6. Adjust and position both skid plates and secure every fastener to the required torque from chart on first page.

