



# INSTALLATION INSTRUCTIONS

## Accessory

ROOF STORAGE BAGS  
P/N 0SL57-HL6-A00

## Application

SXS1000S2X  
SXS1000S2R  
SXS1000S4  
SXS1000S4D

## Publication No.


MII 16561

## Issue Date

August 2019

**Honda Dealer: Please give a copy of these instructions to your customer.**

## PARTS LIST

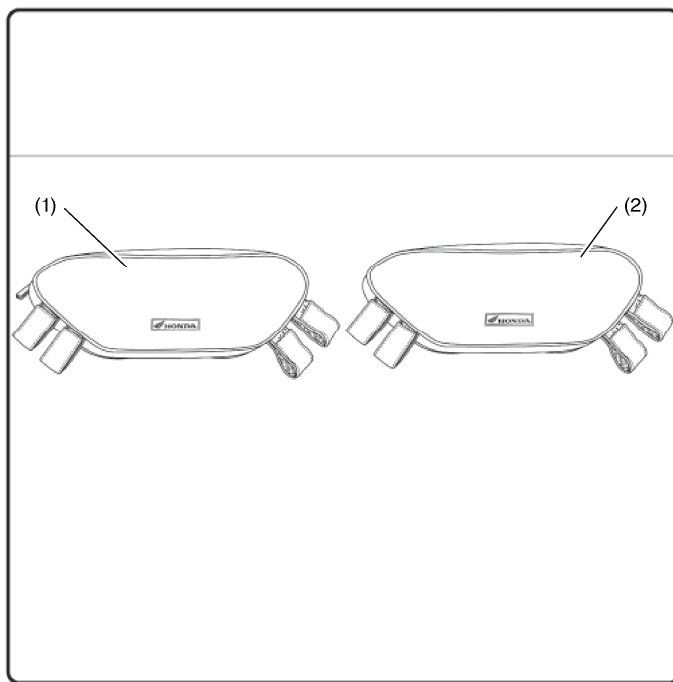

No.	Description	Qty
(1)	Driver roof storage bag	1
(2)	Passenger roof storage bag	1


## USE AND CARE INFORMATION

- The weight of the cargo must not exceed the following maximum weight capacity:

**Maximum Weight Capacity: 1 lb per bag**

- Clean this accessory with warm soapy water and a sponge or soft brush. Let it air dry.
- Do not clean in a washing machine or dryer.
- Check the hook and loop straps periodically to make sure the roof bags are still securely installed.

- Secure the zipper with the elastic catch as shown.

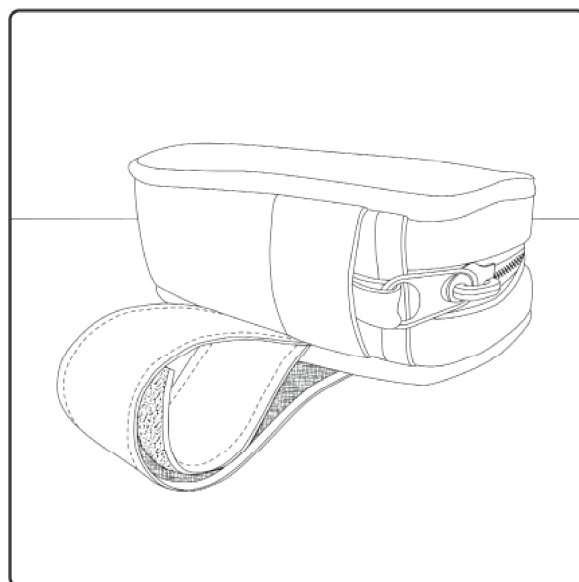


## INSTALLATION


### NOTE:

- The bags are designed for DRIVER and PASSENGER sides of the roof frame. When zippers are closed they should be facing the outer side of the frame.
- Loosen roof bolts at corners prior to wrapping bag straps around cab frame.


1. Remove the roof front corner bolts.

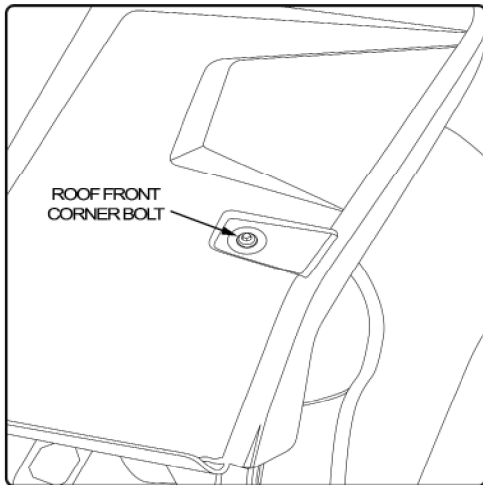


2. Place the driver side roof bag into the corner of the cab frame as shown.

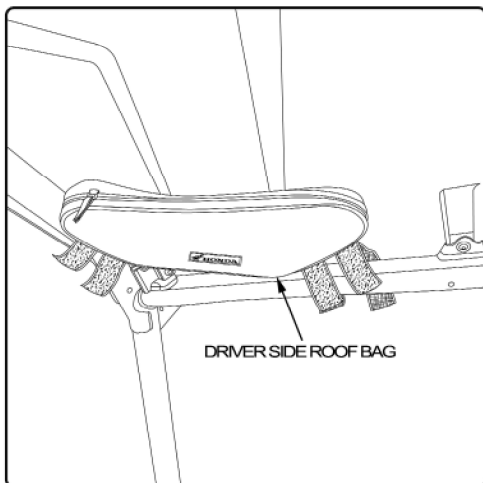

3. Start fastening the outer straps to the cab frame as shown then fasten the straps on the other side.

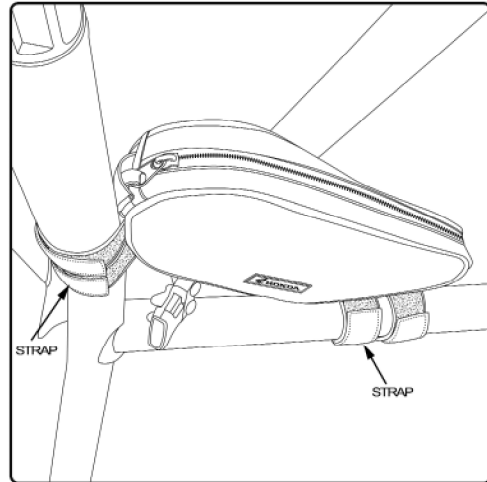

4. Tighten all straps to secure the bag.

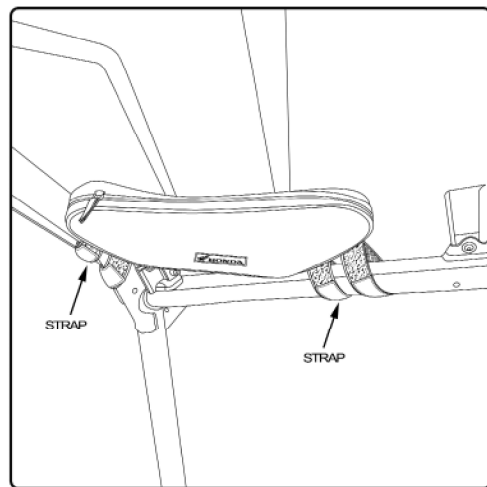

5. Repeat Steps 1 through 4 to install the passenger roof bag.

6. Re-install the roof front corner bolts.

