

HONDA

INSTALLATION INSTRUCTIONS


Accessory
TANK BAG ATTACHMENT
P/N 08L72-MKP-J80

Application
After '18 CB500X/XA

Publication No.
MII 17166
Issue Date
May 2019


Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

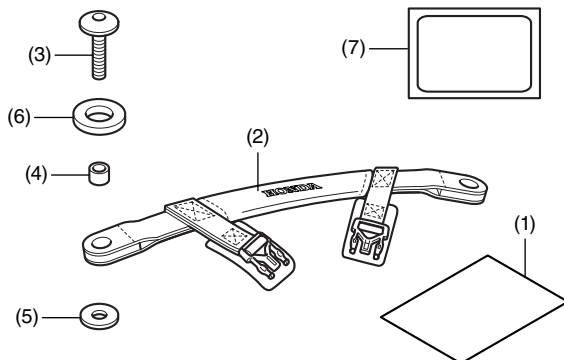

No.	Description	Qty
(1)	Installation Instruction URL	1
(2)	Tank bag strap	1
(3)	6 mm screw	2
(4)	Collar	2
(5)	Washer	2
(6)	Rubber washer	2
(7)	Protection film	3

TANK BAG Sold separately

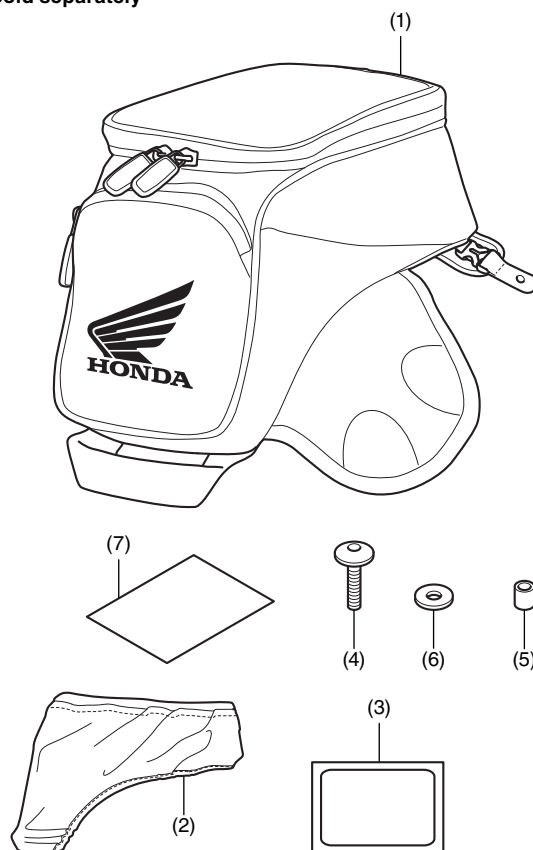

No.	Description	Qty
(1)	Tank bag	1
(2)	Tank bag cover	1
(3)	Protection film (Not used.)	2
(4)	6 mm screw (Not used.)	2
(5)	Collar (Not used.)	2
(6)	Washer (Not used.)	2
(7)	Installation Instruction URL	1

TOOLS AND SUPPLIES REQUIRED

Hex wrench (5 mm)
Ruler
Isopropyl alcohol
Shop towel
Torque wrench

TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N·m	kgf·m	lbf·ft
6 mm screw	10	1.0	7

MAXIMUM LOADING CAPACITY

- The weight of the cargo must not exceed the following maximum loading capacity:

Maximum Loading Capacity	
Tank bag	1.5 kg (3.3 lb)

INSTALLATION


⚠ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTE:

- Heat the bonding surfaces with a hair dryer if the ambient air temperature is below 70°F (21°C).
- The adhesive reaches full strength in 72 hours. Wait at least 24 hours before riding your motorcycle.
- Before installation, remove all dust, sand, etc. from fuel tank and tank bag, as otherwise the fuel tank may be damaged.


- Remove the screws as shown.

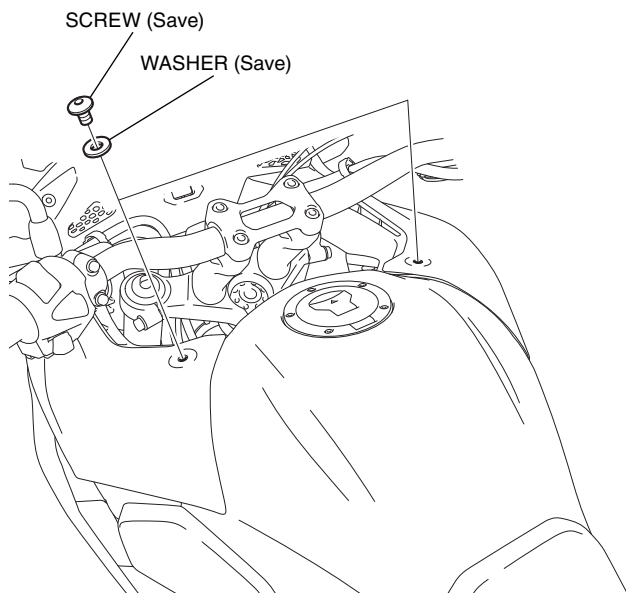


- Remove the straps as shown.

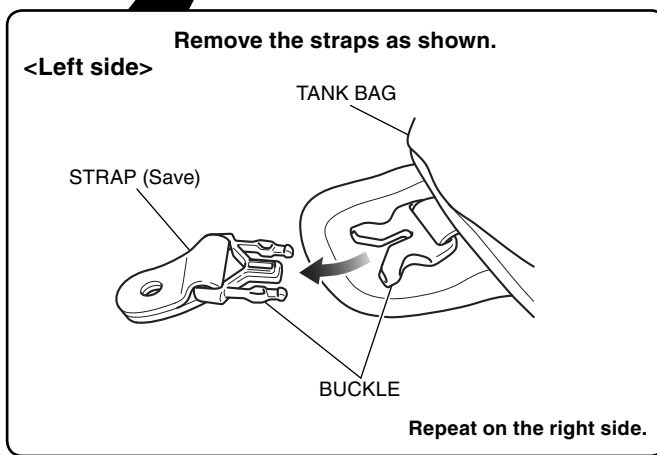



- Install the tank bag strap as shown.

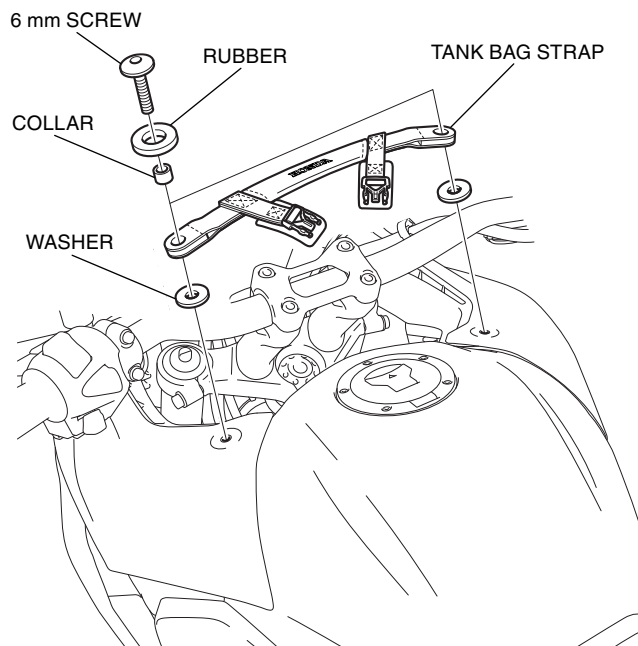



4. Clean the surface of the area shown using isopropyl alcohol.

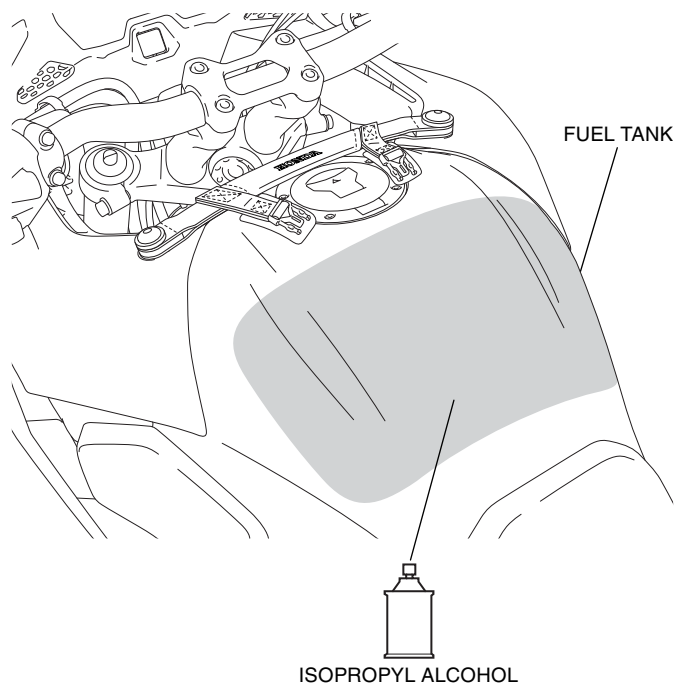

5. Attach the protection film to the fuel tank as shown.

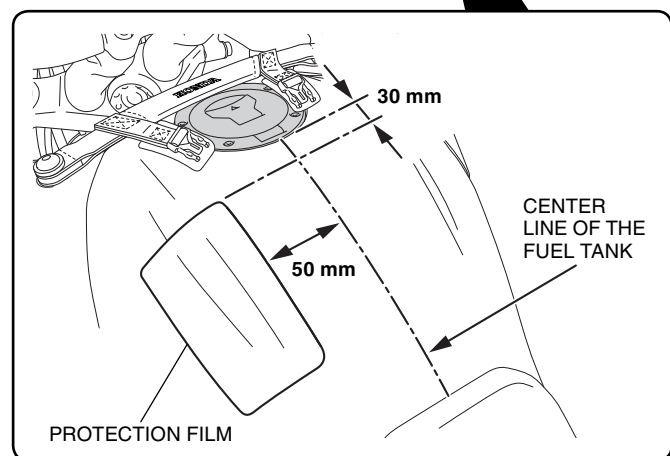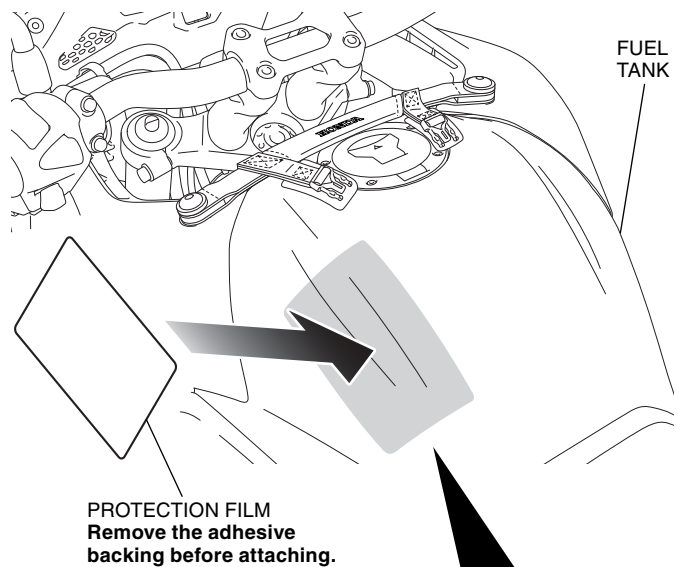

6. Attach the right side in the same manner as the left side.
7. Attach the protection film to the fuel tank as shown.

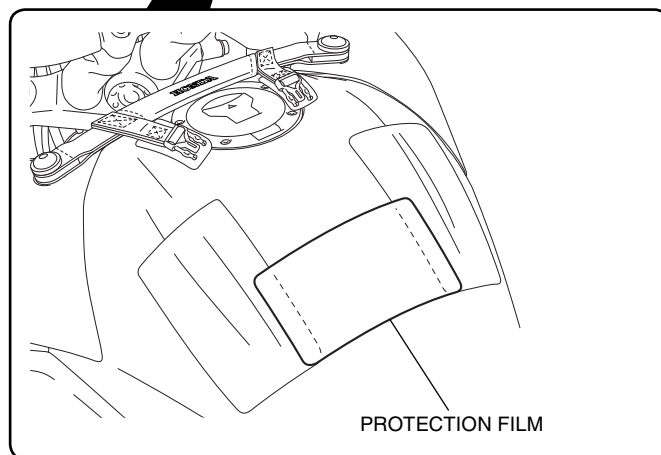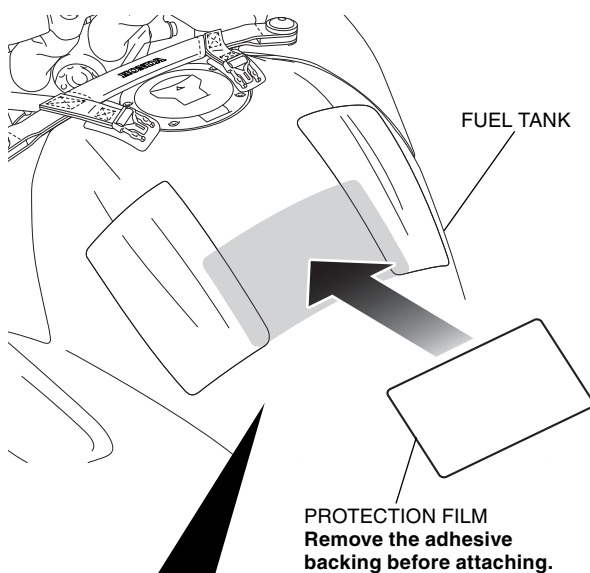

8. Install the tank bag on the fuel tank as shown.

