

TANK BAG

Accessory Name	Parts Number	Application	Issue Date	Publication No.
TANK BAG	08L77-MJP-G51	After '18	May 2024	MII 55145
TANK BAG ATTACHMENT	08L72-MKP-J80	CB500X/XA/NX500		

Introduction

ALL INFORMATION, ILLUSTRATIONS, DIRECTIONS AND SPECIFICATIONS INCLUDED IN THIS PUBLICATION ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF APPROVAL FOR PRINTING. Honda Motor Co., Ltd. RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION WHATSOEVER. NO PART OF THIS PUBLICATION MAY BE REPRODUCED WITHOUT WRITTEN PERMISSION. THIS MANUAL IS WRITTEN FOR PERSONS WHO HAVE ACQUIRED BASIC KNOWLEDGE OF MAINTENANCE ON Honda MOTORCYCLES, MOTOR SCOOTERS, ATVS or SXS's.

Honda Dealer:

Please give a copy of these instructions to your customer.

Customer:

Because the installation of this accessory requires specialized knowledge, special tools and equipment, it is recommended to only install it at a dealer with qualified technicians.

How To Read These Symbols

Your safety, and the safety of others, is very important. To help you make informed decisions we have provided safety messages and other information throughout this manual.

-  **WARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION** You CAN be HURT if you don't follow instructions.
-  **NOTICE** The purpose of this message is to help prevent damage to your vehicle, other property, or the environment.
-  **NOTE** Things you want to know, things that are useful to know.
-  Follow the instructions of the Service Manual.
-  Follow the other instruction symbols of the "Basic Shop Manual".

Other Instruction Symbols

The symbols used throughout these instructions show specific "Warnings and Notices". Refer to the "Basic Shop Manual" for the description of each symbol.

INFORMATION


CAUTION


- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

NOTE:

- Heat the bonding surfaces with a hair dryer if the ambient air temperature is below 70°F (21°C).
- The adhesive reaches full strength in 72 hours. Wait at least 24 hours before riding your motorcycle.
- Before installation, remove all dust, sand, etc. from the fuel tank and tank bag, as otherwise the fuel tank may be damaged.

PARTS LIST

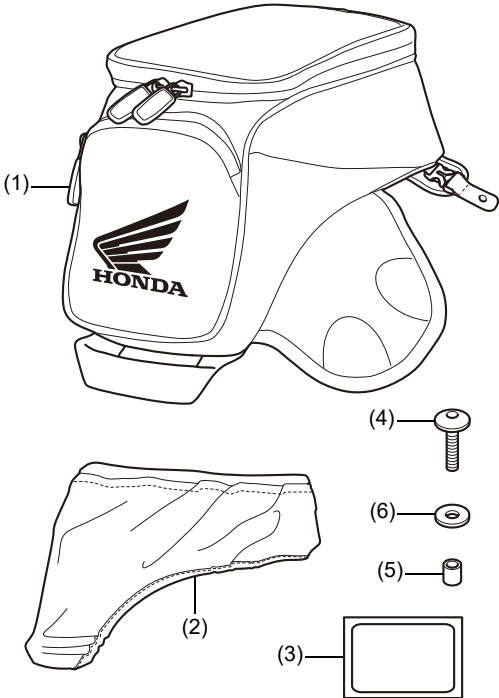Component	No.	Parts Name	Qty	Parts No.
	(1)	Tank bag	1	-
	(2)	Tank bag cover	1	-
	(3)	Protective film (spare parts)	2	-
	(4)	6 mm screw (spare parts)	2	-
	(5)	Collar (spare parts)	2	-
	(6)	Washer (spare parts)	2	-

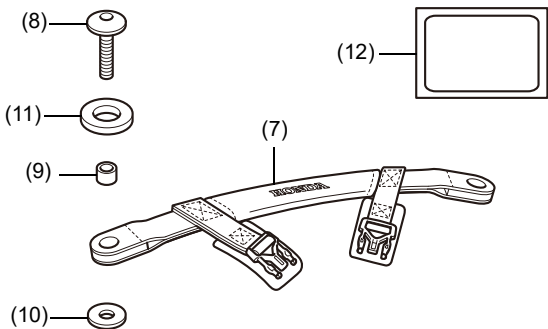
Component	No.	Parts Name	Qty	Parts No.
	(7)	Tank bag strap	1	-
	(8)	6 mm screw	2	-
	(9)	Collar	2	-
	(10)	Washer	2	90439-MB0-000
	(11)	Rubber	2	-
	(12)	Protective film	3	-

TORQUE INFORMATION


Refer to the Service Manual for the torque values including standard torque of the removed parts. (🔧)

INSTALLATION

INSTALLATION IMAGE


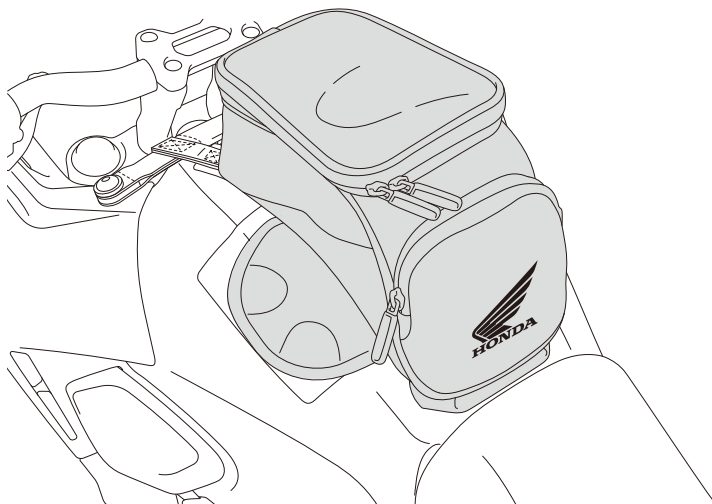


1. Remove the parts as shown.

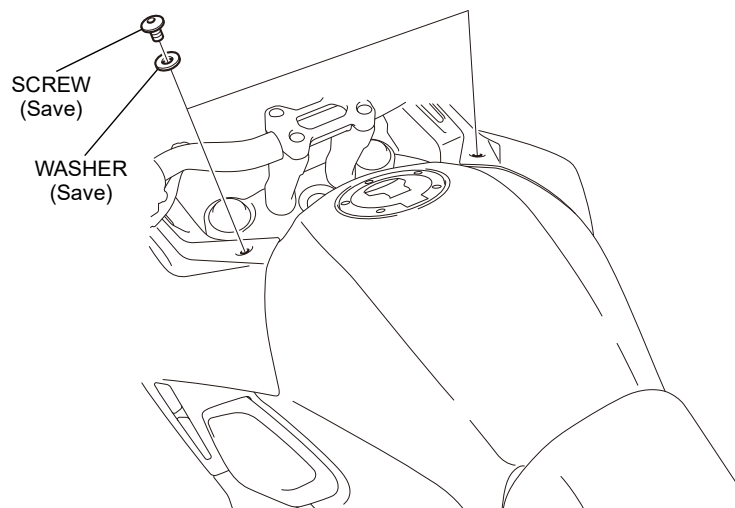


2. Remove the parts as shown.
 - Repeat on the right side.


<Left side>

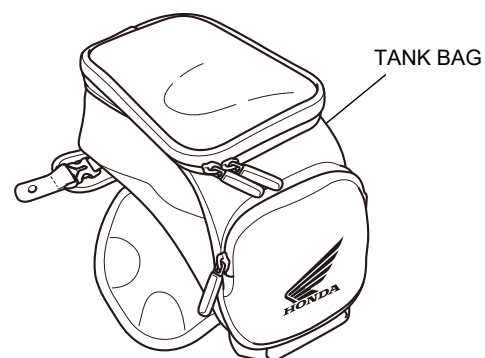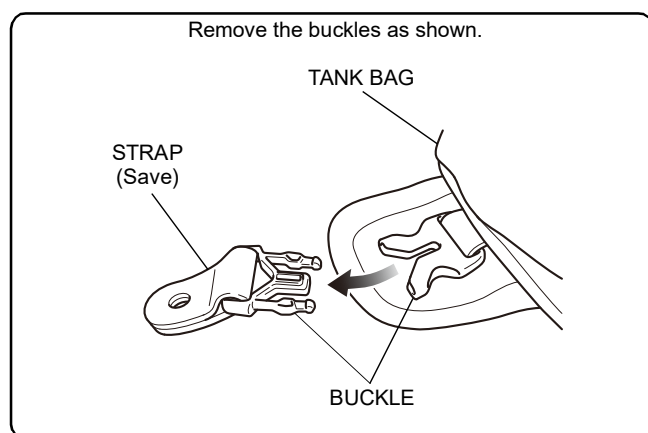

3. Install the parts as shown.

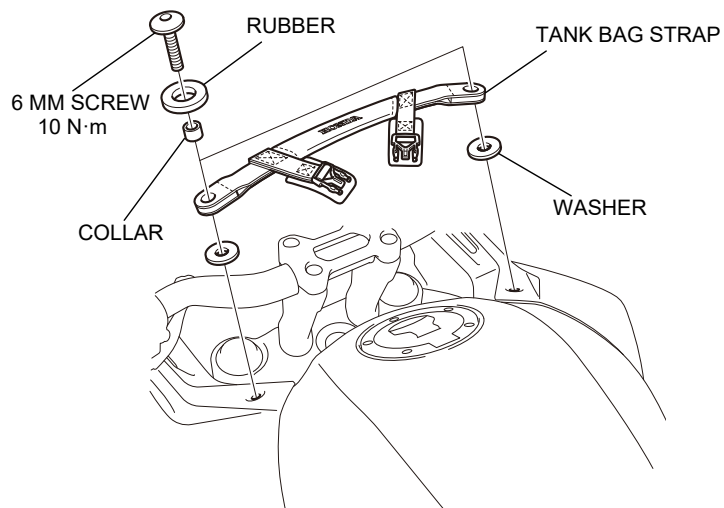


4. Clean the surface of the area shown using an isopropyl alcohol.

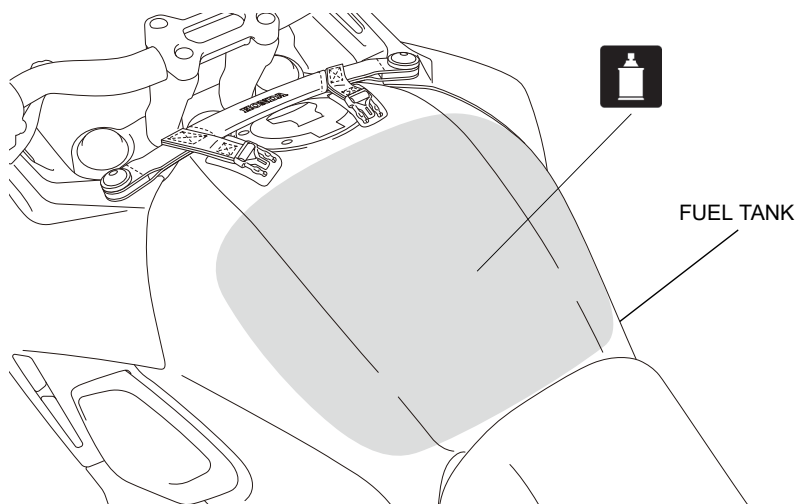


5. Attach the parts as shown.

- Repeat on the right side.

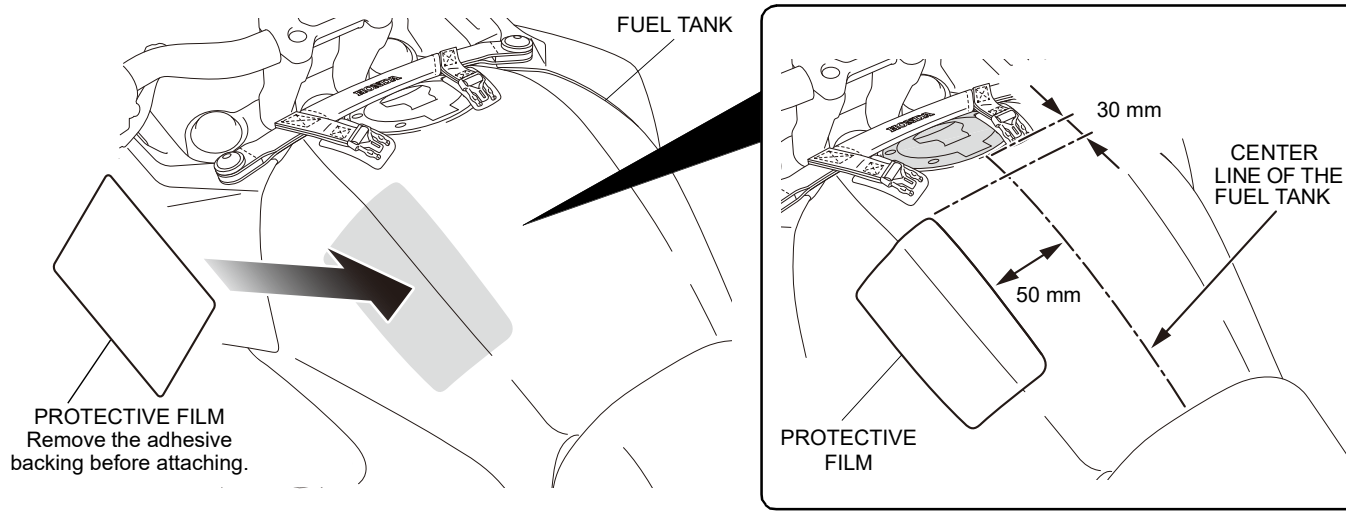

6. Attach the parts as shown.

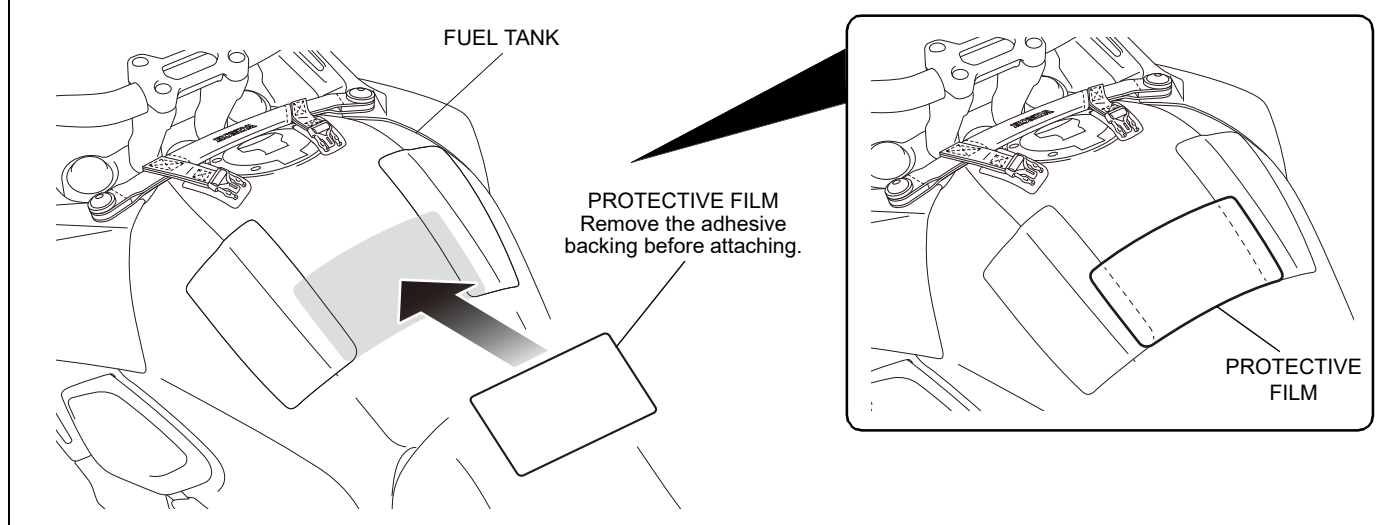

7. Install the parts as shown.
• Repeat on the right side.

<Left side>

