


Accessory	Application	Publication No.
CENTERSTAND P/N 08M70-MGZ-D80	CB500X/XA	MII 14565
		Issue Date
		May 2013

PARTS LIST

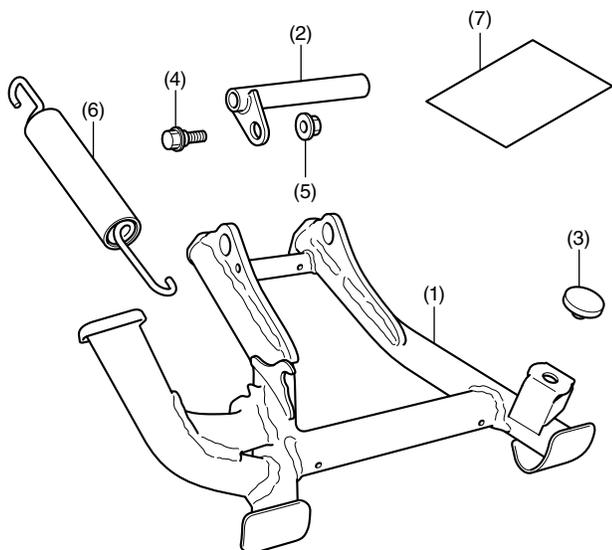

No.	Description	Qty
(1)	Centerstand	1
(2)	Centerstand shaft	1
(3)	Rubber stop	1
(4)	6 mm bolt	1
(5)	6 mm flange nut	1
(6)	Spring	1
(7)	Installation Instruction URL	1

TOOLS AND SUPPLIES REQUIRED

Open-end wrench (10 mm)

Spring tool

Grease

Synthetic detergent solution

(Water : Synthetic detergent / 100 : 1)

Shop towel

Torque wrench

TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N·m	kgf·m	lbf·ft
6 mm bolt	12	1.2	9

INSTALLATION


▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.



NOTE:

- Keep the motorcycle on its sidestand when installing the centerstand.
- Be extremely careful when installing the spring.
- The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.
- Take care not to damage the painted surfaces of the motorcycle.


- Refer to the Service Manual for the motorcycle, remove the left under cover B.

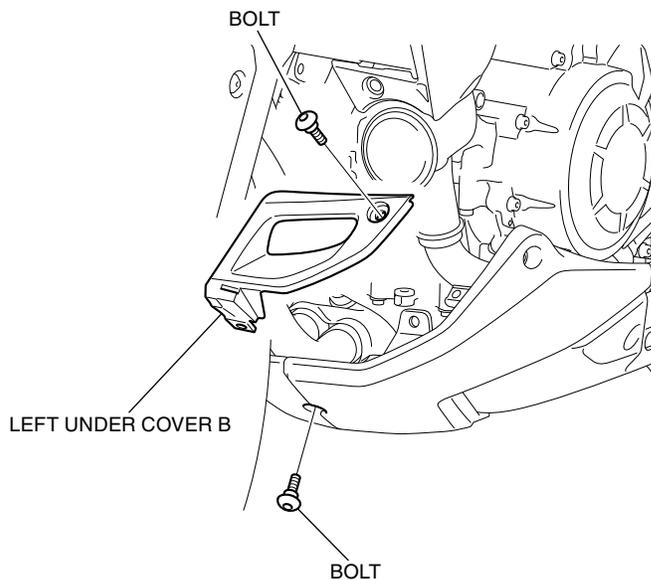


2. Refer to the Service Manual for the motorcycle, remove the left under cowl.

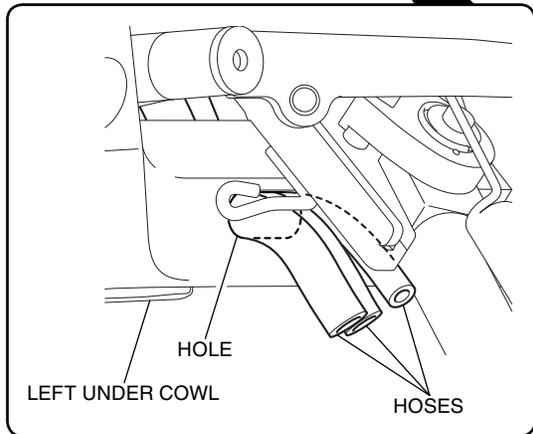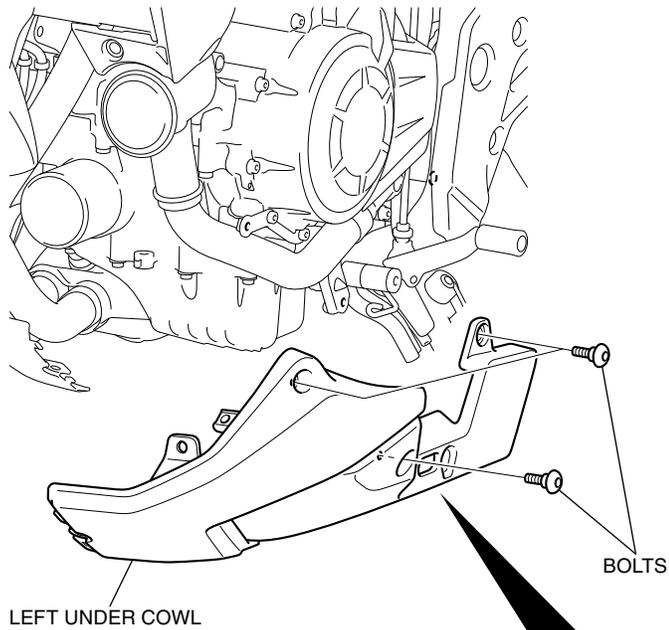


3. Apply synthetic detergent solution to the rubber stop in the area shown.

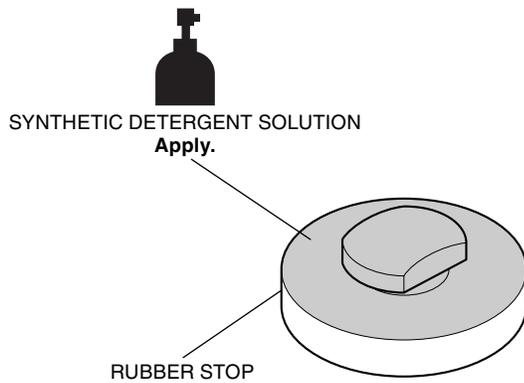


4. Install the rubber stop in the position shown.

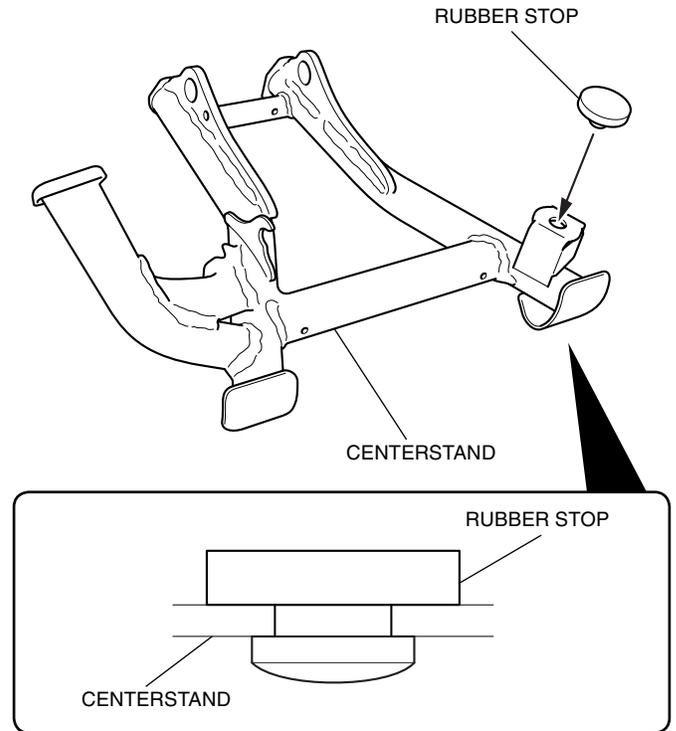


5. Apply grease to the grey area as shown.

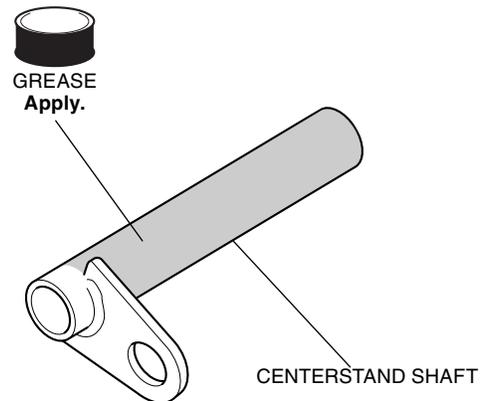

6. Install the centerstand as shown.


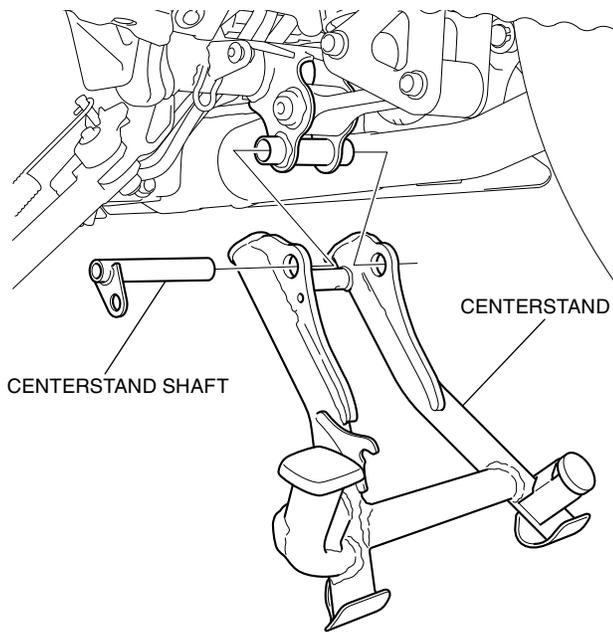


7. Install the 6 mm bolt as shown.

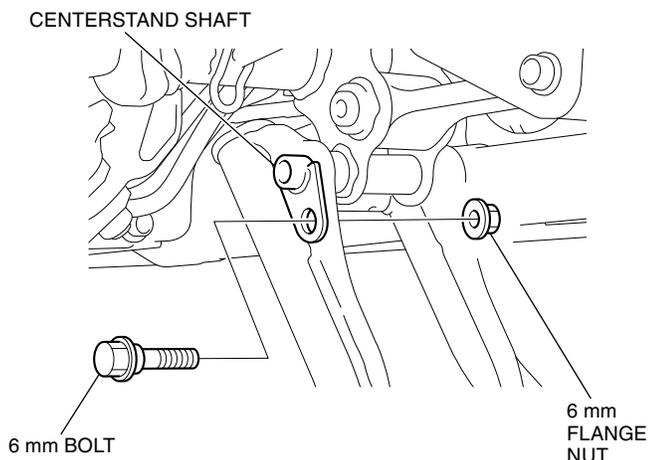

8. Install the spring as shown.

- **First connect the upper side spring hook (short hook).**
- **The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.**

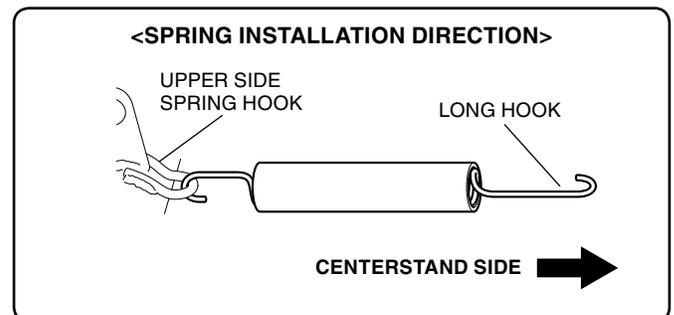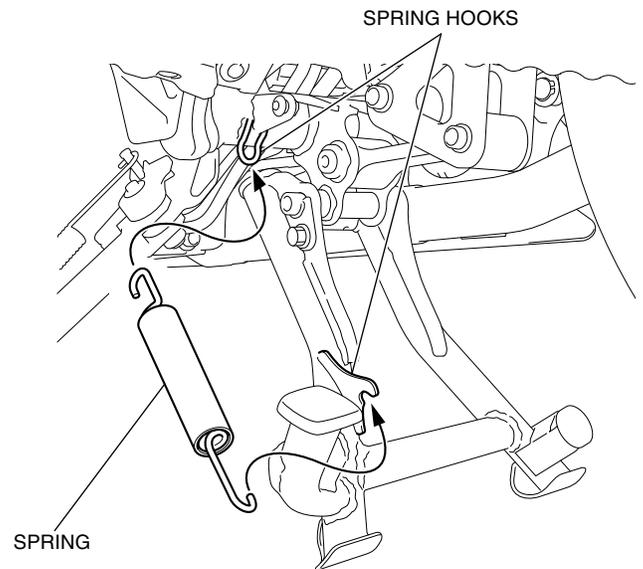

9. Install the motorcycle's parts in the reverse order of removal.